BALSEAL® Electric

BPS系列紧凑型高效开关电源

功率范围：500-1000W

紧凑型高效开关电源/ Compact high-efficiency switching power supply

产品特性/ Features

全范围交流输入176-264VAC
体积小，超薄、紧凑型外观设计
工作温度可高达70℃
短路/过负载/过电压保护功能
符合CE, RoHS标准
高效率，高寿命和高可靠性、
空载低功耗设计

-Full-range AC input 96-264VAC/100-240VAC
-Small, ultra-thin, compact design
-Operating temperature up to 70℃
-Short circuit/overload/overvoltage protection
-CE and RoHS compliant
-High efficiency, long lifespan, and high reliability
-Low power consumption under no-load design



可用于全球范围内的各行各业。

•机床 •半导体制造装置 •注塑机 •食品和包装设备 •立体停车场 •汽车设备 •物流搬运设备
•农业设备 •能源相关设备 等

• Machine tools • Semiconductor manufacturing equipment • Injection molding machines • Food and packaging equipment • Automated parking systems
• Automotive equipment • Logistics handling equipment • Agricultural equipment • Energy-related equipment, etc.

技术参数/ Technical Data

项目 \ 型号	【500W】BPS*-500 12□/24□/48□VDC	【600W】BPS*-600 12□/24□/48□VDC	【800W】BPS*-800 24□/48□VDC	【1000W】BPS*-1000 24□/48□VDC
输入参数				
控制电压范围	170-240VAC			
频率范围	47-63Hz			
效率(TYP)	＞83% typ			
交流电流	3.88A/230VAC	4.66A/230VAC	6.66A/230VAC	7.76A/230VAC
浪涌电流	冷启动30A/230VAC	–	–	–
漏电流	＜0.5mA/220VAC	–	–	–
输出参数				
直流电压	额定电流(A)	额定电流(A)	额定电流(A)	额定电流(A)
12V	41.7	50.0	–	–
24V	20.8	25.0	33.0	41.7
48V	10.42	12.5	16.7	20.83
纹波及噪声	<150mVp-p			
电压调整范围	±10%			
温度系数	＜±0.03%/℃			
线性调整率	±1.0%			
负载调整率	±1.0%			
启动、上升时间	<2.0 S at 120Vac input/<1.0 S at 230Vac input			
保持时间(Typ)	> 20 mS at 120Vac input/> 20 mS at 230Vac input			
保护				
过负载	额定输出功率的1 1 0 - 230 %(间歇、自动复位)			
过电压	–			
动作显示	LED(绿)			
耐电压			**耐振动与抗冲击性**	
输入与输出端子间	3,000V AC · 分钟		频率 10-55 H z 2G 定值、X/Y/Z 方向、各60分钟	
输入与接地端子间	2,000V AC · 分钟		**抗冲击性** 200m/s2、11ms、6 个方向、各1 次	
输出与接地端子间	500VAC · 分钟			
绝缘电阻	100MΩ 以上，500V DC 兆欧表（于25℃、70%RH 时）（输入输出端子间，输入和接地端子间）			
使用环境温度		**使用环境湿度**	**储存温度、湿度**	**温度系数**
-30 ～ +70℃（无结冰，有输出额定值递减特性）		20 ～ 90% RH（无结露）	−40˜+85℃ 10−95% RH, 无冷凝	±0. 03%/˚C （0˜50˚C ）
安全设计与标准				
符合	EN55032(CLSPR32)Class 8,EN55014,EN61000-3-2,-3 GB/T 9254,BSMI CNS13438,EAC TP TC020			
	EN61000-4-2,3,4,5,6,8,11,EN61000-6-2(EN50082-2),EAC TP TC 020			

注意事项
*工作温度可达70˚C [158˚F],线性降额为50˚C至70˚C的半功率[122˚F至158˚F] 有关更多信息，请联系经销商。

BALSEAL® Electric

BPS系列紧凑型高效开关电源

功率范围：500-1000W


型号命名/ Model and naming

- 需要根据使用情况选择
  Select according touapplication requirements.
- 产品型号代码
  Product model code

BPS	24	—	500	*
系列代码 **Series code**	**輸出電壓:V/DC** **Output voltage: V/DC** 12 24 48		**功率(W)** **Power (W)** 500:500W 600:600W 800:800W 1000:1000W	**特殊要求** **special request**


方块图/block diagram

振荡频率: 115VAC :75KHz /230VAC :110KHz

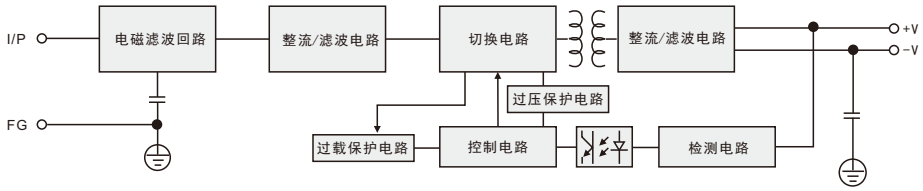

外形尺寸图/ Dimensions


●BPS(500-1000W)外形尺寸图/Dimensional drawing(mm)

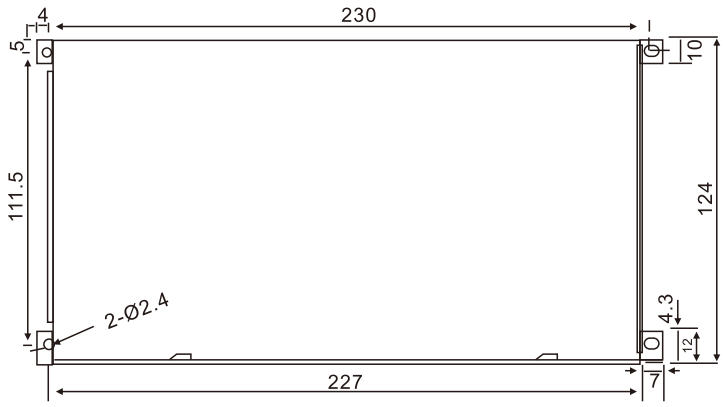


正视图/front view (mm)

接线与连接
Wiring and connections

输入 input		输出 output	
L	线	V-	出-
N	中性	V+	出+
⏚	地线		

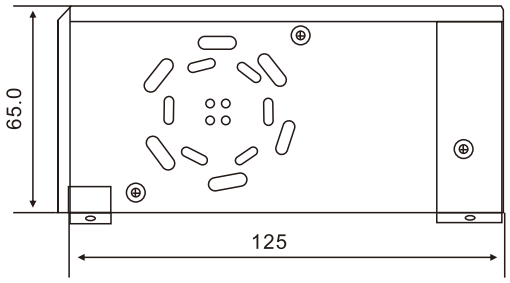

后视图/rear view (mm)

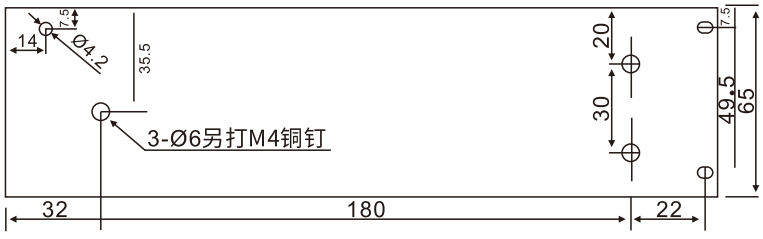

侧视图/side view (mm)