BALSEAL® Electric

Signal Column **Warning Light**

BAL706 Combined Type



Features

- With buzzerProtection grade: IP65
- Flashing frequency: 60-90 times/min
- LED modules can be freely combined and adjusted in quantity.
- Lampshade: PC
- Lamp body: AB
- Sstraight pole: AL

Model column name

Corresponding No. / Number

BAL706-□□□□□/□/□/□/□

Series Code 1 2 3 4 5 6 7 8 9

1-5 Color:	Green: G	Red: R	Blue: B	White: W	Yellow: Y
6 Light Source Mode	I:Steady On	F:Steady Flashing	S:Fast Flashing		
7 Sound Emission Mode	None: No sound	A:Continuous	B:Intermittent	M:Musical tone	
8 Lampshade Appearance	U:Smooth Lampshade	S:Grille Lampshade			
8 Voltage Specification	19:DC12V,	20:DC24V,	22:90-250VAC		
9 Mounting Bracket	LD:22B,22C,22D,22J,22Z				

Applicable mounting bracket models: Standard type\22B, 22C, 22D, 22J, 22Z(Refer to the mounting bracket appendix for specific dimensions)

Rated Parameters

Appearance	Voltage	Current (mA)	LED Color	Frequency	Weight	Dimension
 Smooth Lampshade	DC24V	40mA	Red Steady On Yellow Steady On Green Steady On Blue Steady On White Steady On	100次/min	60g	
	AC110V	20mA				
	AC220V	20mA				
 Grille Lampshade	DC24V	70mA	Red Flashing Yellow Flashing Green Flashing Blue Flashing White Flashing		60g	
	AC110V	25mA				
	AC220V	25mA				

Lampshade Material :PC

Lamp ring material :ABS

Appearance	Voltage	Current (mA)	Frequency	Function	Weight	Dimensions
 Grille lampshade	DC24V	No buzzer	100times/min	85dB	90g	
		Continuous tone			100g	
		Intermittent tone			100g	
	AC110V	No buzzer	100times/min	40dB	90g	
		Continuous tone			100g	
		Intermittent tone			100g	
	AC220V	No buzzer	100times/min	40dB	90g	
		Continuous tone			100g	
		Intermittent tone			100g	

Wire length800

Wiring Schematic Diagram

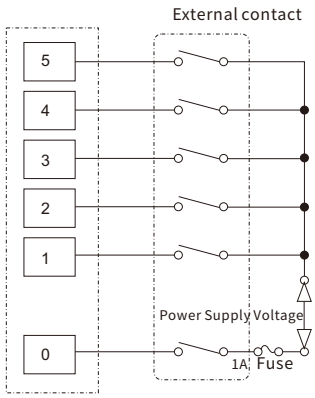

- DC power supply is non-polarized.
- Power cable / Signal cable: Terminal block type

Transistor (NPN/PNP)	
Current Capacity	Ic≥100mA
Withstand Voltage	VC≥35V
Leakage Current	<0.1mA

Voltage	Fuse
All voltages	1A

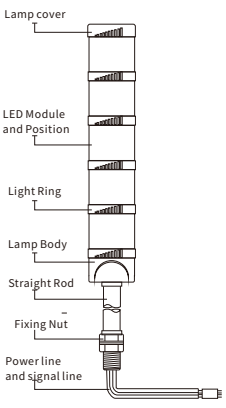

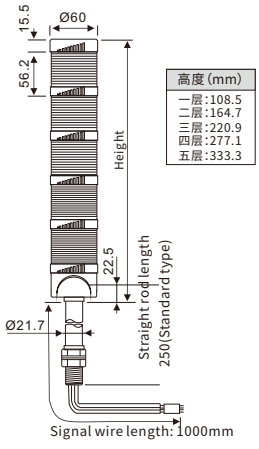

高度(mm)
一层:108.5
二层:164.7
三层:220.9
四层:277.1
五层:333.3

Wiring Schematic Diagram

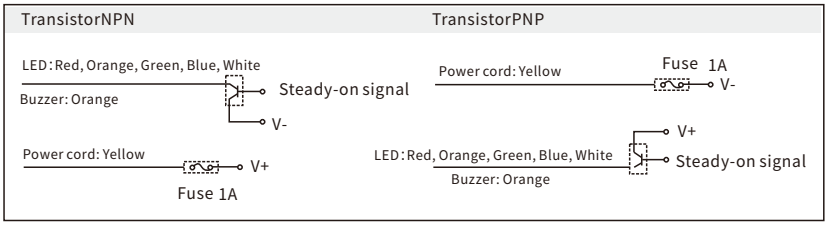

Signal Column **Warning Light**

BAL706 Combined Type

Component Name and Dimensions

Appearance	Dimensions
 Lamp cover	 Material:ABS

Appearance	Dimensions
	10CM
	30CM
	 Note: To be used with 25k or 25J.

Appearance	Dimensions
	10CM
	30CM
	 Note: Can be installed directly, or used with model 22B.

Assembly Diagram of Product and Accessories

