BALSEAL® Electric

Signal Tower Light
BAL90 Single Lamp Series



Features

- High-brightness LED
- Compact Design
- Smooth lampshade, dust-resistant
- Buzzer type, Ip42
- Lampshade: PC
- Housing: Pa66

Model

Corresponding Item No.	BAL90-□/□/□/□ Series Code 1 2 3 4				
1	Color:	Green:G	Red: R	Blue:B	White:W ○ Yellow:Y
2	Sound Emission Mode:	None: No Sound	A:Continuous	B:Intermittent	
3	Voltage Specification	19:DC12V,	20:DC24V,	22:90-250VAC	
4	Light Source Mode	I:Steady On	F:Rotating Flash	S:Flashing	

Notes: Standard version is in color; transparent version is optional, indicated by C.

Mounting Dimensions



Rated Parameters

Model	Voltage	Current LED	Current Buzzer Current (mA)	Weight LED + Buzzer	Frequency	Color
BAL90	DC12V	130	20	230g(240g)	Flashing	
	DC24V	40	20	230g(240g)	100 times/min	
	DC12V	25	20	310g+10g	Rotating Light	
	DC24V	20	20	190g+10g	100Rotating/min	

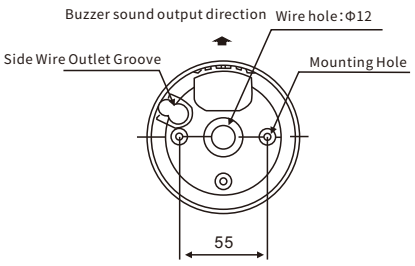

Wiring Diagram





Signal Tower Light
BAL90 Series Accessories

Mounting Bracket

- Suitable for BAL90 series warning lights

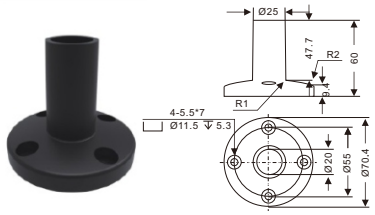

LD-A1



Except for the height, other dimensions are the same as A1.

LD-B1

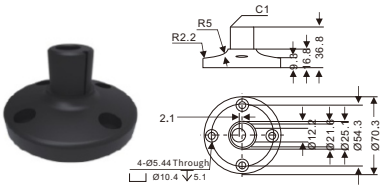

LD-B2

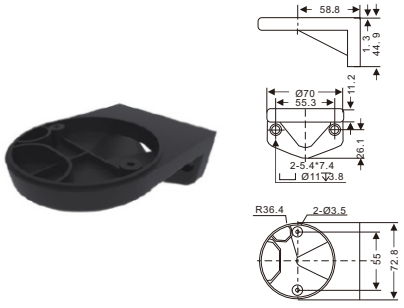

LD-B3

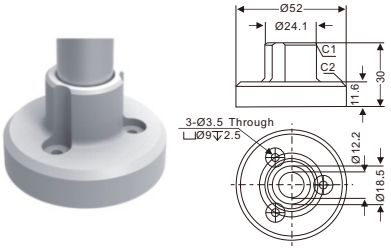

LC-B4