BALSEAL

button box •

BAX series •



BAX series BOX

Specification data

safety standards

IEC/EN60529	CSA C22.2 No.14
UI508	CSA C22.2 No.94
UI50	

Standard conditions of use

Use ambient temperature	-25-+60℃ (No icing)
relative temperature	45-85%RH(No condensation)
Use ambient temperature	-40-+80℃ (No icing)
Usage environment	pollution level:3

protection level

IP65/IP67(Only compatible with the corresponding model)

Electric shock protection level

ClassII (Only compatible with the corresponding model)

Material

Box lid, box bottom:ABS

Box cover mounting screws:Nickel-plated low carbon steel

Feature description

Lightweight control box with IP65 protection rating.

The open-hole design allows for the installation of Ø22 series control components.

The open-type design allows for the internal installation of terminal blocks, serving as a transfer control box.

Also available is a yellow-cased type for emergency stop, and a contact block-protected control box with IP65 protection for the control components wiring section mounted on the panel.

BAX-A

Number of openings		订购型号
Number of holes	Appearance size	
1 Opening type	76*76*59.55	BAX-A01
2 Opening type	76*140*59.55	BAX-A02
3 Opening type	76*200*59.55	BAX-A03
4 Opening type	76*200*59.55	BAX-A04
5 Opening type	76*200*59.55	BAX-A05

BAX-B

Number of openings		Order model
Number of holes	Appearance size	
Holeless button box	76*76*59.55	BAX-B01
	76*140*59.55	BAX-B02
	76*200*59.55	BAX-B03
	76*200*59.55	BAX-B04
	76*200*59.55	BAX-B05

Dimensions mm

BAX-A01
BAX-B01

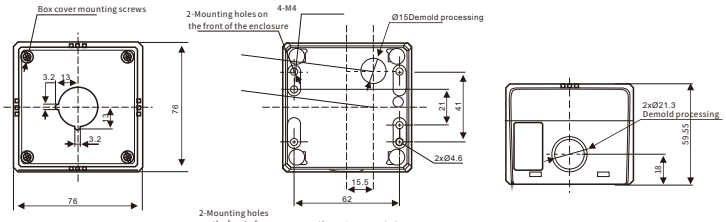

BAX-A02
BAX-B02

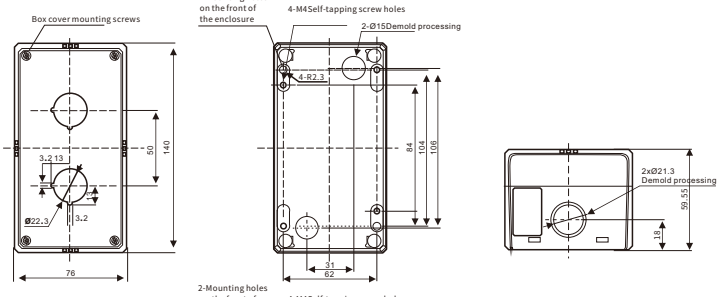

BAX-A03
BAX-B03

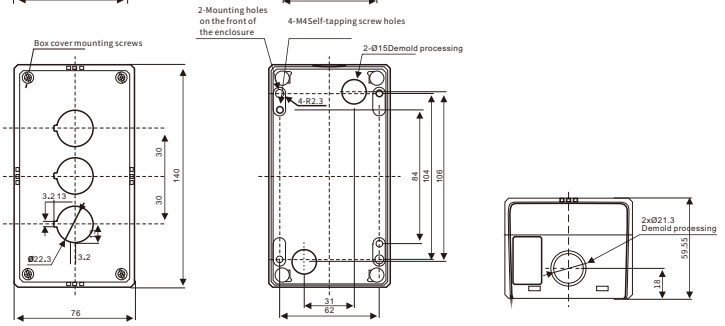

BAX-A05
BAX-B05

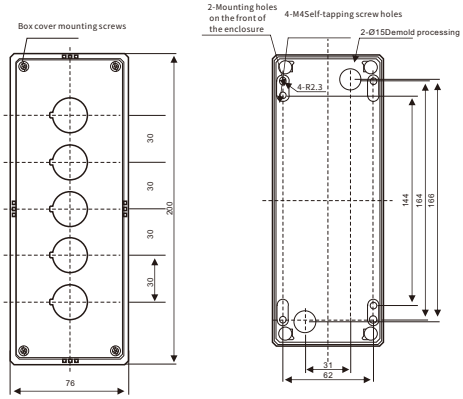

BAX-A04
BAX-B04

